

elevata affidabilità - high reliability

# 6"

## 140 REC54


# PANELLI®

### CARATTERISTICHE IDRAULICHE - HYDRAULIC PERFORMANCES


Q= Portata - Capacity - Debit **50 Hz n= 2900 min**

Tipo Type	Power		l/min	0	500	600	800	1000	1200
	kW	HP		l/sec	8,33	10	13,33	16,67	20
				m³/h	30	36	48	60	72
140 REC 54/3	5,5	7,5	H(m)	39	30	28	24	18	8
140 REC 54/4	7,5	10		52	40	38	32	24	10
140 REC 54/5	7,5	10		65	50	47	40	30	13
140 REC 54/6	9,2	12,5		78	60	56	48	35	16
140 REC 54/7	11	15		91	70	66	56	41	18
140 REC 54/8	13	17,5		104	80	75	64	47	21
140 REC 54/9	13	17,5		117	90	85	72	53	23
140 REC 54/10	15	20		130	100	94	80	59	26
140 REC 54/11	18,5	25		143	110	103	87	65	29
140 REC 54/12	18,5	25		156	120	113	95	71	31
140 REC 54/13	18,5	25		169	130	122	103	77	34
140 REC 54/14	22	30		182	140	132	111	83	36
140 REC 54/15	22	30		195	150	141	119	89	39
140 REC 54/16	26	35		208	160	150	127	94	42
140 REC 54/17	26	35		221	170	160	135	100	44
140 REC 54/18	26	35		234	180	169	143	106	47
140 REC 54/19	30	40		247	190	179	151	112	49
140 REC 54/20	30	40		260	200	188	159	118	52
140 REC 54/21	30	40		273	210	197	167	124	55
140 REC 54/22	37	50		286	220	207	175	130	57
140 REC 54/23	37	50		299	230	216	183	136	60
140 REC 54/24	37	50		312	240	226	191	142	62
140 REC 54/25	37	50		325	250	235	199	148	65

### DIMENSIONI D'INGOMBRO E PESI - OVERALL DIMENSIONS AND WEIGHTS

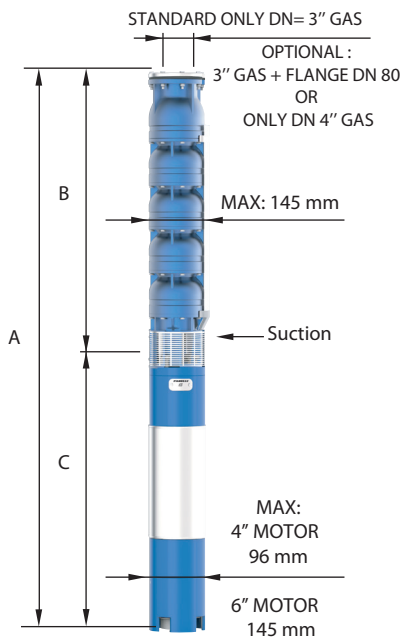

Type	A mm Tri V 400	B mm	C mm Tri	M Kg Tri	P Kg
140 REC 54/3	1285	614	671	45	21
140 REC 54/4	1422	721	701	55	25
140 REC 54/5	1529	828	701	55	30
140 REC 54/6	1686	935	751	60	34
140 REC 54/7	1853	1042	811	65	39
140 REC 54/8	1990	1149	841	70	43
140 REC 54/9	2097	1256	841	70	48
140 REC 54/10	2294	1363	931	75	52
140 REC 54/11	2461	1470	991	83	57
140 REC 54/12	2568	1577	991	83	61
140 REC 54/13	2675	1684	991	83	66
140 REC 54/14	2862	1791	1071	92	70
140 REC 54/15	2969	1898	1071	92	75
140 REC 54/16	3186	2005	1181	100	79
140 REC 54/17	3293	2112	1181	100	84
140 REC 54/18	3400	2219	1181	100	88
140 REC 54/19	3577	2326	1251	108	93
140 REC 54/20	3684	2433	1251	108	97
140 REC 54/21	3791	2540	1251	108	102
140 REC 54/22	3988	2647	1341	118	106
140 REC 54/23	4095	2754	1341	118	111
140 REC 54/24	4202	2861	1341	118	115
140 REC 54/25	4309	2968	1341	118	120

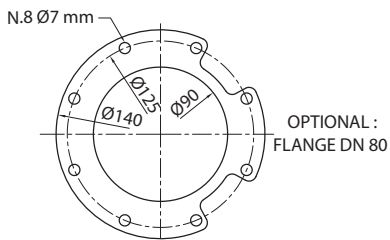

FOR COMMERCIAL TUBE  
EXTERNAL DIAMETER: 88,9 mm

n% = Rendimento della pompa  
n% = Rendement de la pompe  
n% = Pump efficiency  
n% = Rendimiento de la bomba

**Max  
73,6%**

kW/st = Assorbimento per stadio  
kW/st = Absorption par étage  
kW/st = Stage absorption  
kW/st = Potencia absorbida por etapa

**Max  
1,44**

Tolleranza alla sabbia 50 g/m³ - Sand tolerance 50 g/m³

Tolleranze secondo UNI ISO 9906 livello 3B - Tolerances according to UNI ISO 9906 grade 3B