

Ultra Filter System / FSU Series

For above-ground pools, with built-in timer option

Valve

4-Way Multiport Valve

Max Working Pressure

29psi/2bar

Max Water Temperature

40°C (104°F)

Suggested Size Of Media



0.5-0.8mm



Product Information and Dimensions

Code	Model	Filter	Pump	Max. Flow Rate	Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Filter & Pump In/Out Connection	Adaptor
88033669	FSU-8TP	13" Filter	AMU020TP	133.3 lpm 8.0m³/h	17	145	460	494	450	1.5" / 50 mm	1 1/4" & 1 1/2" 32 & 38mm
88033671	FSU-8P	13" Filter	AMU020P	133.3 lpm 8.0m³/h	17	145	460	494	450	1.5" / 50 mm	1 1/4" & 1 1/2" 32 & 38mm

Note: Suggested sand weight varies with differences in filter media size. For reference only.

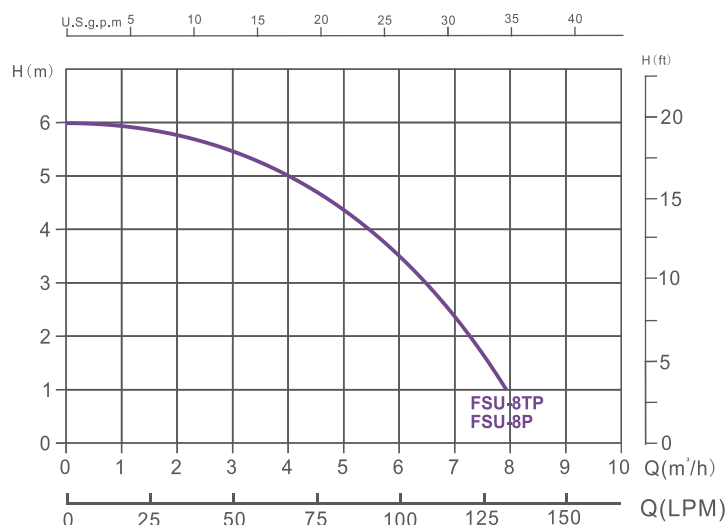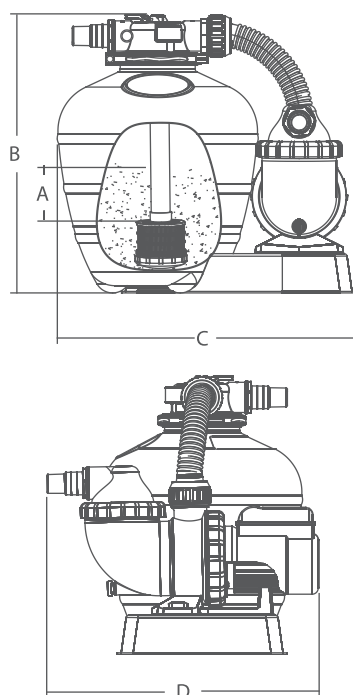

Note: Flow curve information based on 220V/50Hz motor.

FSU Series Filtration Combo

includes:

1. Durable top mount plastic filter tank
2. 4-Way Multiport Valve
3. Aqua-Mini Pump (AMU020TP or AMU020P)
4. Timer (optional)