

ACTWELL **LUBRICATION** **EQUIPMENT**

PROFESSIONAL
EXCELLENT QUALITY
ENVIRONMENTAL PROTECTION





**S483
T483
V483**

Mobile Grease Lubricator, capacity 30 kgs or for 16 kgs pail

Model No.	Container Size	Pressure Ratio	Recommended Operating Pressure	Delivery Rate	Shipping N.W.	Shipping G.W.	Shipping Measurement
S483	30 kgs or 16 kgs original pail	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●●	24.1 kgs	26.9 kgs	6.1 cuft
T483	30 kgs or 16 kgs original pail	50:1	4 - 8 kg/cm ²	1.23 kgs/min ●●	24.1 kgs	26.9 kgs	6.1 cuft
V483	30 kgs or 16 kgs original pail	60:1	4 - 7 kg/cm ²	0.99 kgs/min ●●	24.1 kgs	26.9 kgs	6.1 cuft

S483/T483/V483

consisting of :

- S40** Grease Pump ratio 45:1/
- T40** Grease Pump ratio 50:1/
- V40** Grease Pump ratio 60:1
- 40054** 3/8" Air Connector
- 40053** 1/4" Fluid Coupler

- 40797-10** 1/4" Grease Hose 10 feet
- 40731** Grease Gun
- 48901** Container Assembly (I.D.322mm)
- 483913** Base Assembly
- 43912** Handle Assembly

● At 6 kg/cm²
 ■ Using NLGI #2 grease at room temperature 25°C



**S482
T482
V482**

Mobile Grease Lubricator, capacity 30 kgs or for 16 kgs pail

Model No.	Container Size	Pressure Ratio	Recommended Operating Pressure	Delivery Rate	Shipping N.W.	Shipping G.W.	Shipping Measurement
S482	30 kgs or 16 kgs original pail	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●●	18.4 kgs	20.8 kgs	6.9 cuft
T482	30 kgs or 16 kgs original pail	50:1	4 - 8 kg/cm ²	1.23 kgs/min ●●	18.4 kgs	20.8 kgs	6.9 cuft
V482	30 kgs or 16 kgs original pail	60:1	4 - 7 kg/cm ²	0.99 kgs/min ●●	18.4 kgs	20.8 kgs	6.9 cuft

S482/T482/V482

consisting of :

- S40** Grease Pump ratio 45:1/
- T40** Grease Pump ratio 50:1/
- V40** Grease Pump ratio 60:1
- 40054** 3/8" Air Connector
- 40053** 1/4" Fluid Coupler

- 40797-10** 1/4" Grease Hose 10 feet
- 40731** Grease Gun
- 48901** Container Assembly (I.D. 322mm)
- 482911** Base Assembly

● At 6 kg/cm²
 ■ Using NLGI #2 grease at room temperature 25°C



**S43
T43
V43**

Mobile Grease Lubricator, for 16-20 kgs pail

Model No.	Container Size	Pressure Ratio	Recommended Operating Pressure	Delivery Rate	Shipping N.W.	Shipping G.W.	Shipping Measurement
S43	16 -20 kgs	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●●	25.2 kgs	28.0 kgs	6.1 cuft
T43	16 -20 kgs	50:1	4 - 8 kg/cm ²	1.23 kgs/min ●●	25.2 kgs	28.0 kgs	6.1 cuft
V43	16 -20 kgs	60:1	4 - 7 kg/cm ²	0.99 kgs/min ●●	25.2 kgs	28.0 kgs	6.1 cuft

S43/T43/V43

consisting of :

- S40** Grease Pump ratio 45:1/
- T40** Grease Pump ratio 50:1/
- V40** Grease Pump ratio 60:1
- 40054** 3/8" Air Connector
- 40053** 1/4" Fluid Coupler

- 40797-10** 1/4" Grease Hose 10 feet
- 40731** Grease Gun
- 43901** Shield Assembly (I.D. 340mm)
- 43913** Base Assembly
- 43912** Handle Assembly

● At 6 kg/cm²
 ■ Using NLGI #2 grease at room temperature 25°C



**S42
T42
V42**

Mobile Grease Lubricator, for 16 kgs pail

Model No.	Container Size	Pressure Ratio	Recommended Operating Pressure	Delivery Rate	Shipping N.W.	Shipping G.W.	Shipping Measurement
S42	16 kgs	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●●	19.3 kgs	21.7 kgs	6.7 cuft
T42	16 kgs	50:1	4 - 8 kg/cm ²	1.23 kgs/min ●●	19.3 kgs	21.7 kgs	6.7 cuft
V42	16 kgs	60:1	4 - 7 kg/cm ²	0.99 kgs/min ●●	19.3 kgs	21.7 kgs	6.7 cuft

S42/T42/V42

consisting of :

- S40** Grease Pump ratio 45:1/
- T40** Grease Pump ratio 50:1/
- V40** Grease Pump ratio 60:1
- 40054** 3/8" Air Connector
- 40053** 1/4" Fluid Coupler

- 40797-10** 1/4" Grease Hose 10 feet
- 40731** Grease Gun
- 42901** Shield Assembly (I.D. 315mm)
- 42911** Base Assembly

● At 6 kg/cm²
 ■ Using NLGI #2 grease at room temperature 25°C



**S31
T31
V31**

Portable Grease Lubricator, for 16-20 kgs pail

Model No.	Container Size	Pressure Ratio	Recommended Operating Pressure	Delivery Rate	Shipping N.W.	Shipping G.W.	Shipping Measurement
S31	16-20 kgs	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●●	11.4 kgs	12.6 kgs	1.4 cuft
T31	16-20 kgs	50:1	4 - 8 kg/cm ²	1.23 kgs/min ●●	11.4 kgs	12.6 kgs	1.4 cuft
V31	16-20 kgs	60:1	4 - 7 kg/cm ²	0.99 kgs/min ●●	11.4 kgs	12.6 kgs	1.4 cuft

S31/T31/V31

consisting of :

- S30** Grease Pump ratio 45:1/
- T30** Grease Pump ratio 50:1/
- V30** Grease Pump ratio 60:1
- 40054** 3/8" Air Connector

- 40053** 1/4" Fluid Coupler
- 40797-10** 1/4" Grease Hose 10 feet
- 40731** Grease Gun
- 31903** Drum Cover

● At 6 kg/cm²
 ■ Using NLGI #2 grease at room temperature 25°C

S43 / T43 / V43

Air-operated Grease Lubricator

氣動黃油機

Mobile type for standard 16 - 20 kgs pail
移動式-16~20公斤油桶用



Features :

- 10 feet two wire braided High Pressure Grease Hose, allows access to hard to reach applications.
- 40731 High Pressure Grease Gun with 40721 360° swivel for one-handed operation.
- 43901 Shield assembly I.D. 340mm.
- 43913 Base with 2 wheels & 1 caster, allows greasing unit easily moved to applications.
- 43912 Handle allows moving greasing unit easily.
- Pumping and suction are two separate systems to avoid contamination of fluid.
- Applicable grease range NLGI #00 - 2.

We have optional 41922 Follower Plate w/rubber rim prevents air pocket, helps priming grease and wipes container clean.


特點 :

- (1) 配備10呎高壓油管。
- (2) 高壓油槍搭配萬向接頭，方便、可單手操作。
- (3) 桶內徑為34公分。
- (4) 大輪手推車，適合於不平地面使用。
- (5) 幫浦作動為兩獨立系統，以免空氣污染油脂。
- (6) 適用NLGI#00-02號黃油。

※另有41922膠邊壓板可供選購，可更有效利用油脂。

Instructions :

使用示意圖 :

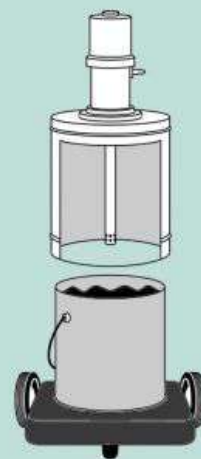

Model No. 型號	S43	T43	V43
	S40 Grease pump ratio : 45:1 S40 黃油幫浦，壓力比：45:1	T40 Grease pump ratio : 50:1 T40 黃油幫浦，壓力比：50:1	V40 Grease pump ratio : 60:1 V40 黃油幫浦，壓力比：60:1
Consisting of 產品標準配備	40054 3/8" Air Connector 3/8" 空氣接頭 40053 1/4" Fluid Coupler 1/4" 接頭 40797-10 1/4" Grease Hose 10 feet 1/4" 高壓油管10呎 40731 Grease Gun 黃油槍 43901 Shield Assembly 桶(內徑34公分) 43913 Base Assembly 底座 43912 Handle Assembly 扶手		

Model No. 型號	Container Size 容量	Pressure Ratio 壓力比	Recommended Operating Pressure 推薦使用壓力	Delivery Rate 輸出量	Shipping N.W. 淨重	Shipping G.W. 毛重	Shipping Measurement 材積
S43	16 - 20 kgs	45:1	4 - 9 kg/cm ²	1.40 kgs/min ●■	24.9 kgs	27.5 kgs	6.0 cuft
T43		50:1	4 - 8 kg/cm ²	1.23 kgs/min ●■			
V43		60:1	4 - 7 kg/cm ²	0.99 kgs/min ●■			

● At 6 kg/cm² ■ Using NLGI #2 grease at room temperature 25 °C



S81 / T81 / V81

Air-operated Grease Lubricator 氣動黃油機

Fixed type for standard 180 kgs drum
固定式-180公斤油桶用

Features :

- 20 feet two wire braided High Pressure Grease Hose, allows access to hard to reach applications.
- 40731 High Pressure Grease Gun with 40721 360° swivel for one-handed operation.
- 81905 Drum Cover prevents contamination.
- 81921 Follower Plate prevents air pockets & helps priming grease.
- Pumping and suction are two separate systems to avoid contamination of fluid.
- Applicable grease range NLGI #00 - 2.

We have optional 81922 Follower Plate with rubber rim -- wipes drum clean. Standard, included in set is 81921.

特點：

- (1) 配備20呎高壓油管。
- (2) 高壓油槍搭配萬向接頭，方便、可單手操作。
- (3) 附桶蓋可避免油脂受到汙染。
- (4) 附壓板有助於出油更順暢。
- (5) 幫浦作動為兩獨立系統，以免空氣污染油脂。
- (6) 適用NLGI#00-02號黃油。

※另有81922膠邊壓板可供選購，可更有效利用油脂。
標準配備為81921無膠邊壓板。

Model No. 型號	S81	T81	V81
	S80 Grease pump ratio : 45:1 S80 黃油幫浦， 壓力比：45:1	T80 Grease pump ratio : 50:1 T80 黃油幫浦， 壓力比：50:1	V80 Grease pump ratio : 60:1 V80 黃油幫浦， 壓力比：60:1
Cosisting of 產品標準配備	40054 3/8" Air Connector 3/8" 空氣接頭 40053 1/4" Fluid Coupler 1/4" 接頭 40797-20 1/4" Grease Hose 20 feet 1/4" 高壓油管20呎 40731 Grease Gun 黃油槍 81905 Drum Cover 桶蓋 81921 Follower Plate 壓板		



Option 選購

81922
Follower Plate
- with rubber rim
膠邊壓板

Model No. 型號	Container Size 容量	Pressure Ratio 壓力比	Recommended Operating Pressure 推薦使用壓力	Delivery Rate 輸出量	Shipping N.W. 淨重	Shipping G.W. 毛重	Shipping Measurement 材積
S81	180 kgs	45:1	5 - 9 kg/cm ²	1.25 kgs/min ●■	22.2 kgs	24.0 kgs	2.4 cuft
T81		50:1	5 - 8 kg/cm ²	1.16 kgs/min ●■			
V81		60:1	5 - 7 kg/cm ²	0.96 kgs/min ●■			

● At 6 kg/cm² ■ Using NLGI #2 grease at room temperature 25 °C