

066



Válvula de esfera LONDON, paso total

MEDIDA	PRESIÓN	CÓDIGO	EMBALAJE
1/4" (DN 8)	5bar/72.5psi	066B014	12/144
3/8" (DN 10)	5bar/72.5psi	066B038	12/144
1/2" (DN 15)	5bar/72.5psi	066B012	10/90
3/4" (DN 20)	5bar/72.5psi	066B034	8/64
1" (DN 25)	5bar/72.5psi	066B100	6/48
1"1/4 (DN 32)	5bar/72.5psi	066B114	3/24
1"1/2 (DN 40)	5bar/72.5psi	066B112	2/10
2" (DN 50)	5bar/72.5psi	066B200	2/10
2"1/2 (DN 65)	18bar/261psi	1200212G	1/5
3" (DN 80)	16bar/232psi	1200300G	1/3
4" (DN 100)	14bar/203psi	1200400G	1/2

CERTIFICADAS EN331 (hasta 2").

Conexiones roscadas hembra/hembra.

Cuerpo de latón niquelado.


Mando palanca en acero (aluminio en las medidas 2"1/2 - 3" - 4").

Temperatura mínima y máxima de trabajo: -20°C, 60°C.

Conexiones roscadas hembra:

- ISO 7/1 Rp paralelo (equivalente a DIN EN 10226-1 y BS EN 10226-1) 1/4" a 2".
- ISO 228 (equivalente a DIN EN ISO 228 y BS EN ISO 228) 2"1/2 - 3" - 4".



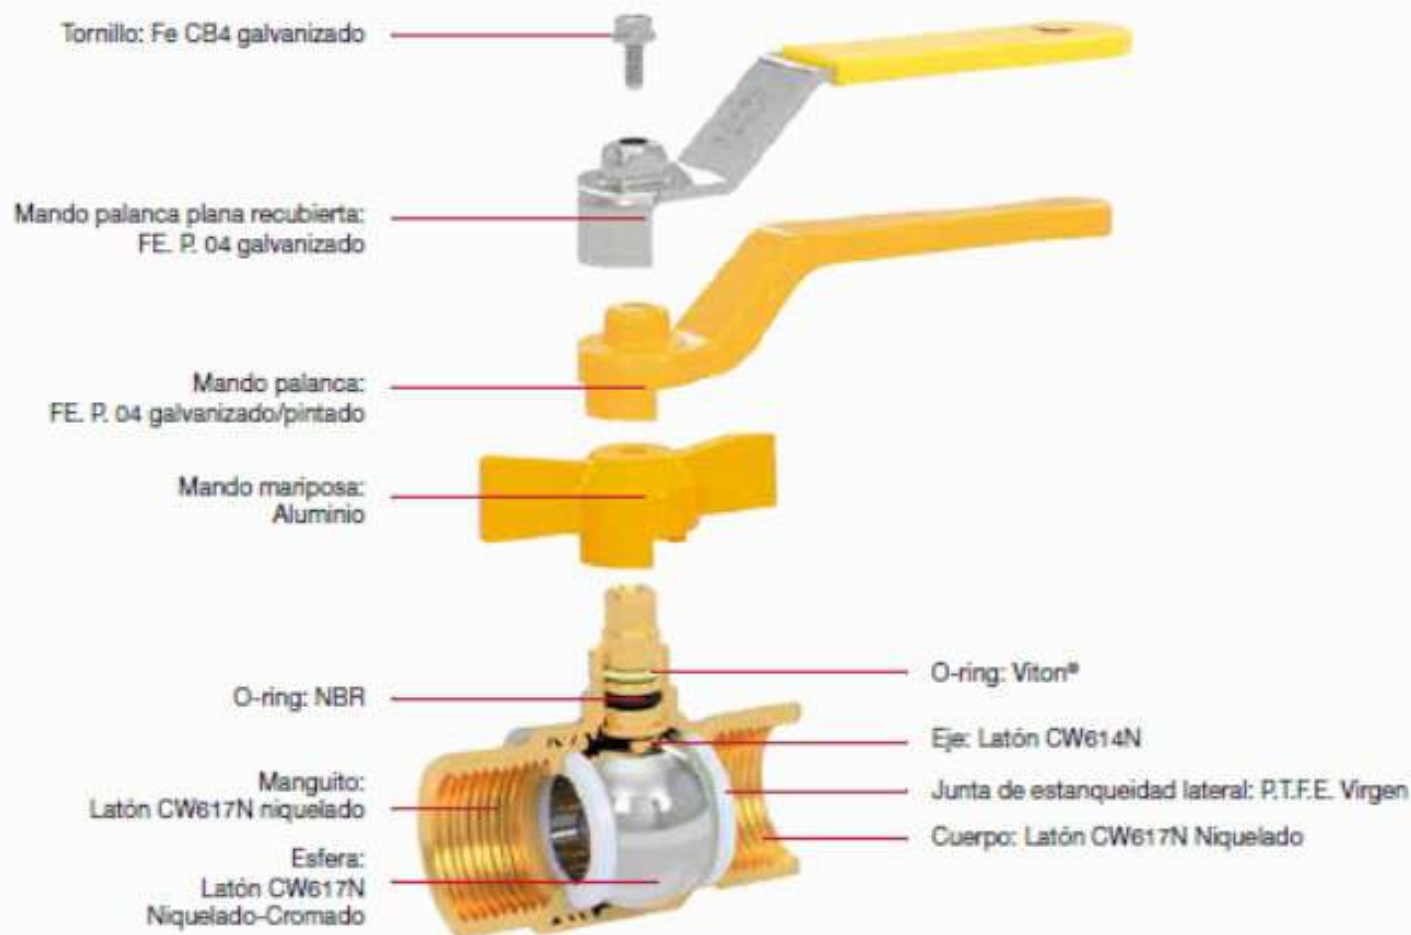

Cuadro diámetros
unidad de medida mm

	ITAP	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
LONDON	066	10	10	15	20	25	32	40	50	65	80	100
	067	8	10	15	20	25	32	39	50	63	74	97
	068	10	10	15	20	25	-	-	-	-	-	-
	069	8	10	15	20	25	-	-	-	-	-	-
	266	10	10	15	20	25	32	40	50	-	-	-
	267	8	10	15	20	25	32	39	50	-	-	-